



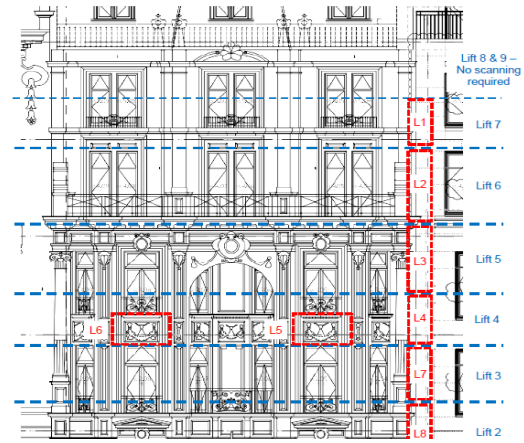

RESTORE
LONDON

48-49 Pall Mall

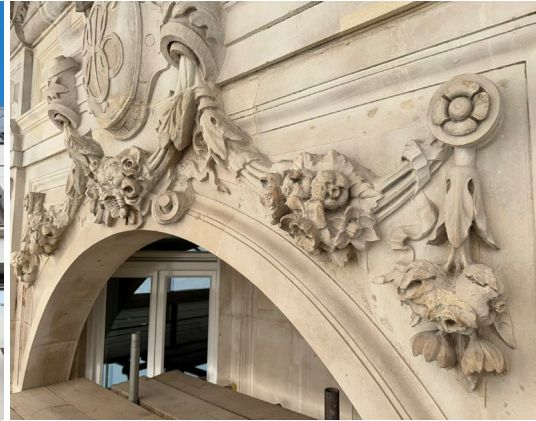

“What struck me immediately was the passion they demonstrated for their work. For Restore London, this was not merely a job but a true labour of love, driven by a commitment to achieving the best possible outcome. This dedication and enthusiasm were evident throughout the entire team.”

Andreas Karkocki – Project Manager, Real Estate Management (UK) Ltd

Scope of Works

Restore London completed façade cleaning and restoration to this Portland stone façade on the North side of Pall Mall. The Ornate fabric was initially cleaned by our specialist team using super-heated steam and then carefully surveyed to ascertain the locations and dimensions of repairs required. Our report identified stone re-pointing, plastic mortar repairs, pinning and stone indenting (using matching Portland Limestone scant) to areas of the façade including the 3-storey cartouche key stoned arch and the flanking Corinthian columns on tall pedestals that carries the entablature. Our works also included the provision of access scaffolding, heritage window replacement, refurbishment and window re-decoration.

Project Name:	48-49 Pall Mall
Location:	London
Client:	Real Estate Management (UK) Ltd
Principal Contractor:	Restore London
Duration:	16 Weeks
Completion Date:	May 2025
Value:	£235K

